



Cutler-Hammer

NEMA 12 Conversion Kit for 9000X Adjustable Frequency Drive

Installation Manual

New Information
January 2004



January 2004

Important Notice – Please Read

The product discussed in this literature is subject to terms and conditions outlined in Eaton Electrical Inc. selling policies. The sole source governing the rights and remedies of any purchaser of this equipment is the relevant Eaton Electrical Inc. selling policy.

NO WARRANTIES, EXPRESS OR IMPLIED, INCLUDING WARRANTIES OF FITNESS FOR A PARTICULAR PURPOSE OR MERCHANTABILITY, OR WARRANTIES ARISING FROM COURSE OF DEALING OR USAGE OF TRADE, ARE MADE REGARDING THE INFORMATION, RECOMMENDATIONS AND DESCRIPTIONS CONTAINED HEREIN. In no event will Eaton Electrical Inc. be responsible to the purchaser or user in contract, in tort (including negligence), strict liability or otherwise for any special, indirect, incidental or consequential damage or loss whatsoever, including but not limited to damage or loss of use of equipment, plant or power system, cost of capital, loss of power, additional expenses in the use of existing power facilities, or claims against the purchaser or user by its customers resulting from the use of the information, recommendations and descriptions contained herein.

The information contained in this manual is subject to change without notice.

Cover Photo: Cutler-Hammer® 9000X Drives

Table of Contents

SAFETY	
Definitions and Symbols	iii
Hazardous High Voltage	iii
CHAPTER 1 — General	1-1
CHAPTER 2 — Contents of Kits	
OPTN12FR4 (Frame 4) and OPTN12FR5 (Frame 5)	2-1
OPTN12FR6 (Frame 6)	2-2
CHAPTER 3 — Installation	
Installation Instructions for Frame 4	3-1
Installation Instructions for Frame 5	3-4
Installation Instructions for Frame 6	3-7
CHAPTER 4 — Specifications	4-1

List of Figures

Figure 2-1: Contents of NEMA Type 12 Kit for OPTN12FR4 and OPTN12FR5	2-1
Figure 2-2: Contents of NEMA Type 12 Kit for OPTN12FR6	2-2

List of Tables

Table 3-1: Instructions for NEMA Type 12 Kit Installation — Frame 4	3-1
Table 3-2: Instructions for NEMA Type 12 Kit Installation — Frame 5	3-4
Table 3-3: Instructions for NEMA Type 12 Kit Installation — Frame 6	3-7
Table 4-1: NEMA Type 12 Kit — Dimensions and Weight	4-1

January 2004

Safety

Definitions and Symbols

 **WARNING**

This symbol indicates high voltage. It calls your attention to items or operations that could be dangerous to you and other persons operating this equipment. Read the message and follow the instructions carefully.



This symbol is the “Safety Alert Symbol.” It occurs with either of two signal words: CAUTION or WARNING, as described below.

 **WARNING**

Indicates a potentially hazardous situation which, if not avoided, can result in serious injury or death.

 **CAUTION**

Indicates a potentially hazardous situation which, if not avoided, can result in minor to moderate injury, or serious damage to the product. The situation described in the CAUTION may, if not avoided, lead to serious results. Important safety measures are described in CAUTION (as well as WARNING).

Hazardous High Voltage

 **WARNING**

Motor control equipment and electronic controllers are connected to hazardous line voltages. When servicing drives and electronic controllers, there may be exposed components with housings or protrusions at or above line potential. Extreme care should be taken to protect against shock.

Stand on an insulating pad and make it a habit to use only one hand when checking components. Always work with another person in case an emergency occurs. Disconnect power before checking controllers or performing maintenance. Be sure equipment is properly grounded. Wear safety glasses whenever working on electronic controllers or rotating machinery.

 **WARNING**

After disconnecting the utility, wait until the unit cooling fan stops and the indicators on the control panel are extinguished (if no keypad is present, check the indicators in the cover). Wait five more minutes before doing any work on the connections. Do not open the cover before this time has run out.

January 2004

Chapter 1 — General

The NEMA Type 12 Kit is used to convert a Cutler-Hammer® 9000X drive by Eaton Electrical® from a NEMA Type 1 to a NEMA Type 12 enclosure. A NEMA Type 12 enclosure may be necessary when the adjustable frequency drive is used in ambient conditions that may contain moisture or dust.

According to standard IEC 60529 (EN 60 529), the NEMA Type 12 adjustable frequency drives enclosure provides protection against dust and water sprayed from all directions. Limited ingress of both is permitted.

Note: A NEMA Type 12 enclosure does not protect the adjustable frequency drive against strong jets of water or against the effects of immersion.

January 2004

Chapter 2 — Contents of Kits

OPTN12FR4 (Frame 4) and OPTN12FR5 (Frame 5)

The contents of the NEMA Type 12 Kits for Frames 4 and 5 are shown in **Figure 2-1**.

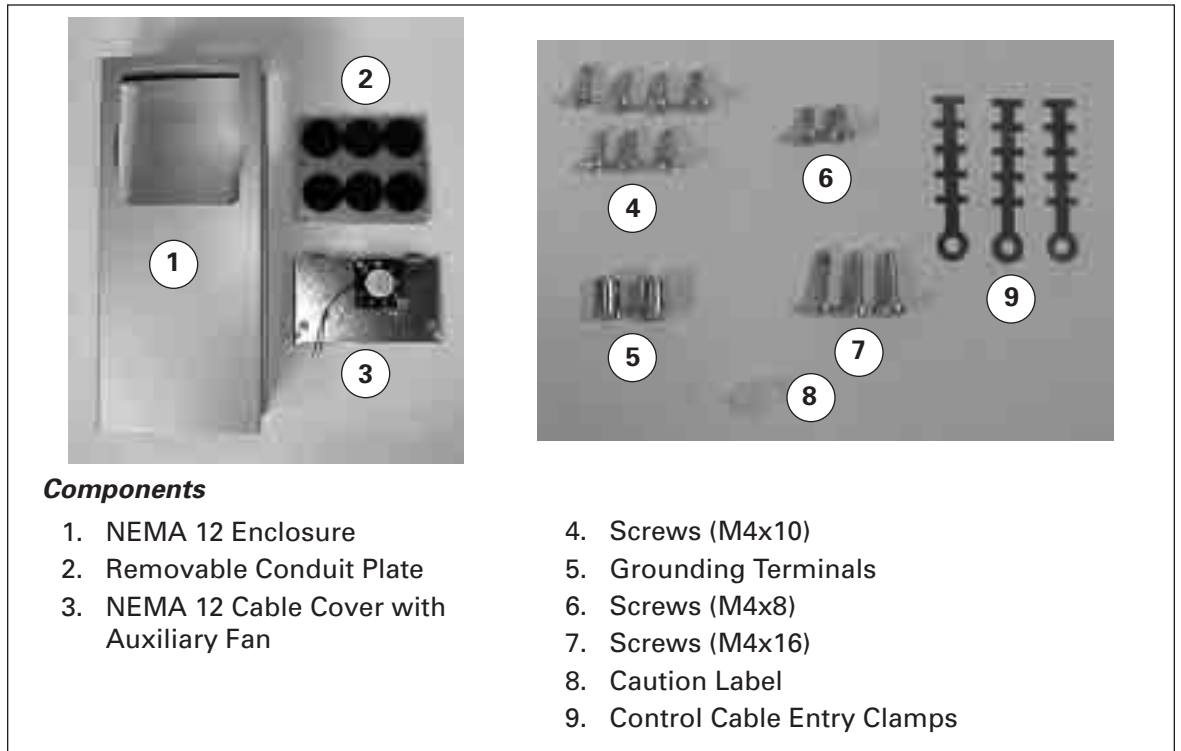


Figure 2-1: Contents of NEMA Type 12 Kit for OPTN12FR4 and OPTN12FR5

OPTN12FR6 (Frame 6)

The contents of the NEMA Type 12 Kit for Frame 6 is shown in **Figure 2-2**.

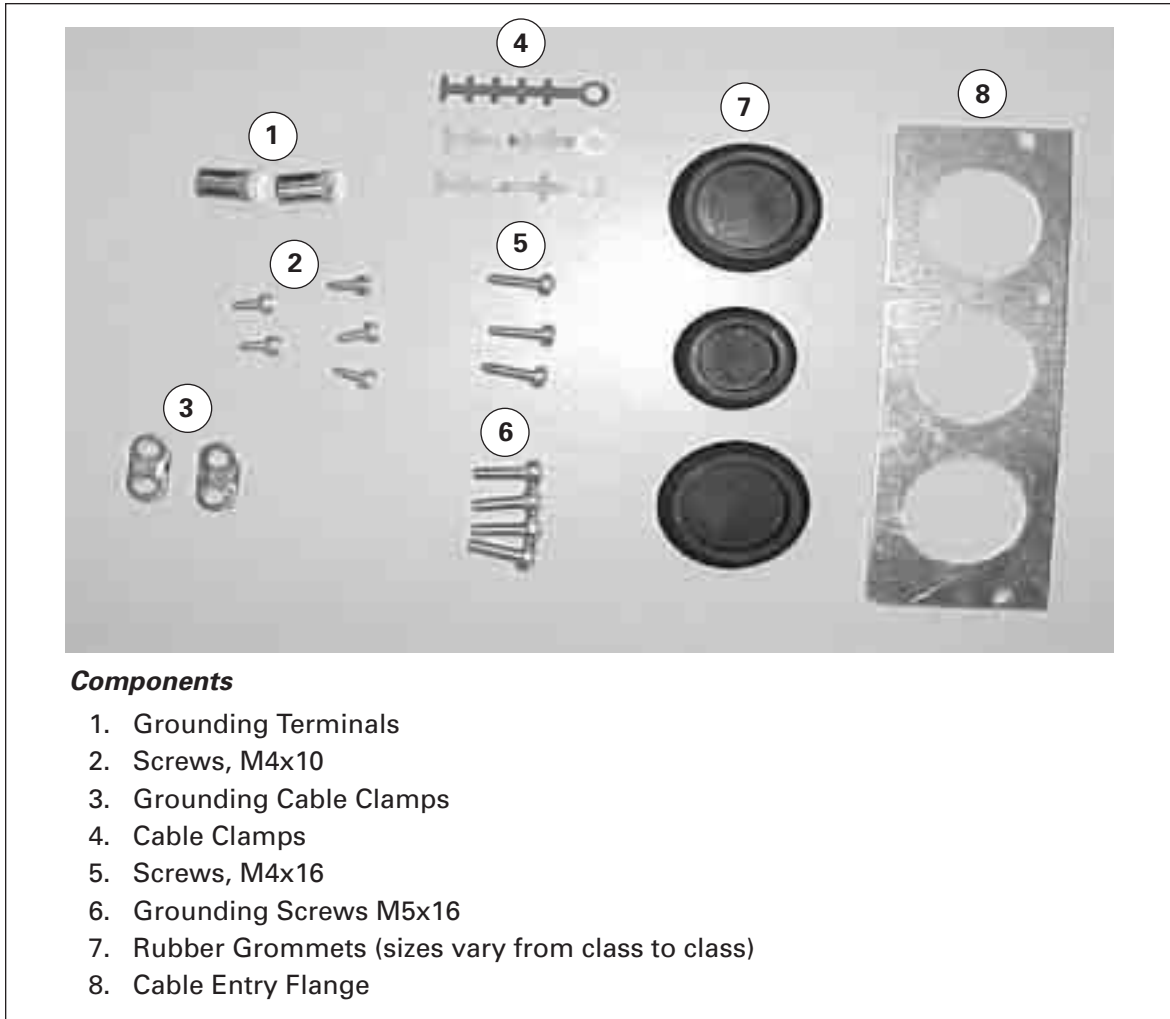


Figure 2-2: Contents of NEMA Type 12 Kit for OPTN12FR6

January 2004

Chapter 3 — Installation

Installation Instructions for Frame 4

⚠ WARNING

After disconnecting the utility, wait until the unit cooling fan stops and the indicators on the control panel are extinguished (if no keypad is present, check the indicators in the cover). Wait five more minutes before doing any work on the connections. Do not open the cover before this time has run out.

Table 3-1: Instructions for NEMA Type 12 Kit Installation — Frame 4


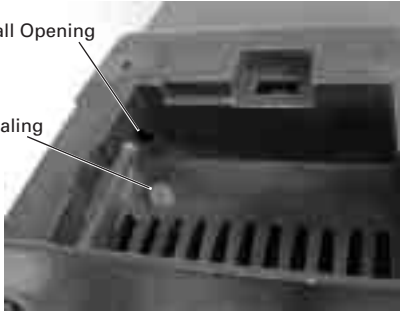









Step	Procedure
1	Detach the fan carefully by pushing into the connector on the side. 
2	Insert the plastic sealing that is shown next to the hole. 
3	Re-install the fan ensuring that the connector clip fits accurately. 

Table 3-1: Instructions for NEMA Type 12 Kit Installation — Frame 4, continued

Step	Procedure
4	Remove the cover of the control. 
5	Open the control cable cover and remove the cable cover and detach the grounding rack. 
6	Close the cable entry with the grounding lugs. 
7	Attach the cable cover with fan #2. 

January 2004

Table 3-1: Instructions for NEMA Type 12 Kit Installation — Frame 4, continued




Step	Procedure	
8	Connect the red wire into terminal 6 and the black wire into terminal 7.	
9	Re-install the grounding rack with cable clamps mounted using (M4x16) screws next to fan (#2).	
10	Install the NEMA 12 conduit plate on the base of the drive.	
11	Tightly screw in the enclosure using the attached screws.	

Installation Instructions for Frame 5

⚠ WARNING

After disconnecting the utility, wait until the unit cooling fan stops and the indicators on the control panel are extinguished (if no keypad is present, check the indicators in the cover). Wait five more minutes before doing any work on the connections. Do not open the cover before this time has run out.

Table 3-2: Instructions for NEMA Type 12 Kit Installation — Frame 5

Step	Procedure
1	Remove the cover of the AF Drive. 
2	Open the small lid on the power unit cover, and leave the opening uncovered. 
3	Detach the fan carefully by pushing into the connector on the side. 

January 2004

Table 3-2: Instructions for NEMA Type 12 Kit Installation — Frame 5, continued









Step	Procedure
4	Insert the rubber sealing as shown for FR5. 
5	Re-install the fan ensuring that the connector clip fits accurately. Do not force. 
6	Open the control cable cover, remove the cable cover, and detach the grounding rack. 
7	Close the cable entry with the screws provided. 

Table 3-2: Instructions for NEMA Type 12 Kit Installation — Frame 5, continued

Step	Procedure
8	<p>Attach the #2 cooling fan to the NEMA Type 12 power cable cover.</p> 
9	<p>Connect the red wire into terminal 6 and the black into terminal 7.</p> 
10	<p>Re-install the grounding rack with cable clamps mounted using (M4x16) screws next to fan (#2).</p> 
11	<p>Install the NEMA 12 cable entry flange on the base of the drive.</p> 

January 2004

Installation Instructions for Frame 6

Table 3-3: Instructions for NEMA Type 12 Kit Installation — Frame 6


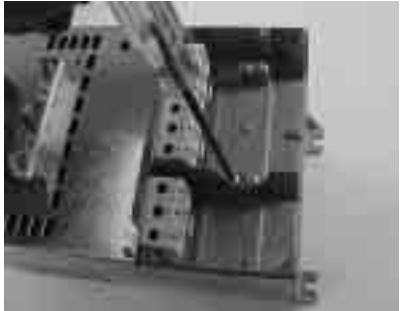










Step	Procedure
1	Remove the cover of the AF Drive. 
2	Remove the cable cover and screw the grounding cable clamps into place. 
3	Re-install the cable cover. 
4	Mount the cable clamps on the grounding rack with the three M4x16 screws. 

Table 3-3: Instructions for NEMA Type 12 Kit Installation — Frame 6, continued

Step	Procedure
5	<p>Open the small lid on the power unit cover, and set the screw aside for later use.</p> 
6	<p>Seal the air inlets with the rubber sealing that comes with the kit.</p> 
7	<p>Mount the fan as shown over the closed inlets, and use screws from Step 5.</p> 
8	<p>Connect the red wire into terminal #6 and the black into terminal #7.</p> 

January 2004

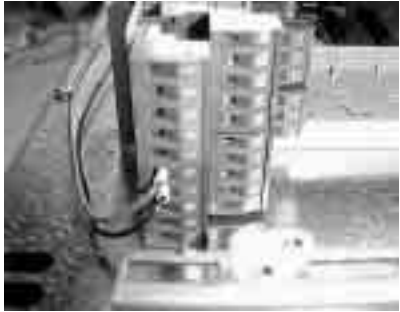Table 3-3: Instructions for NEMA Type 12 Kit Installation — Frame 6, continued

Step	Procedure
9	Route wiring as shown in the picture at right. 
10	Install the NEMA Type 12 cable entry flange on the base of the drive. 
11	Cover the adjustable frequency drive with the NEMA Type 12 enclosure. 
12	Tightly screw in the enclosure using the attached screws. 

January 2004

Chapter 4 — Specifications

Table 4-1: NEMA Type 12 Kit — Dimensions and Weight

Catalog Number	Frame Size	Approximate Dimensions in Inches (mm)			Approximate Weight in Lb. (kg)
		Length	Width	Height	Weight
OPTN12FR4	Fr4	13 (330)	7 (178)	4 (102)	4 (1.8)
OPTN12FR5	Fr5	16 (406)	8 (203)	7 (178)	5 (2.3)
OPTN12FR6	Fr6	21 (533)	10 (254)	5 (127)	7 (3.2)

Company Information

Eaton Electrical Inc. is a global leader in electrical control, power distribution, and industrial automation products and services. Through advanced product development, world-class manufacturing methods, and global engineering services and support, Eaton Electrical® provides customer-driven solutions under brand names such as Cutler-Hammer®, Durant®, Heinemann®, Holec® and MEM®, which globally serve the changing needs of the industrial, utility, light commercial, residential, and OEM markets. For more information, visit www.eatonelectrical.com.

Eaton Corporation is a global diversified industrial manufacturer with 2002 sales of \$7.2 billion that is a leader in fluid power systems; electrical power quality, distribution and control; automotive engine air management and fuel economy; and intelligent drivetrain systems for fuel economy and safety in trucks. Eaton has 51,000 employees and sells products in more than 50 countries. For more information, visit www.eaton.com.

Eaton Electrical
1000 Cherrington Parkway
Moon Township, PA 15108-4312
USA
tel: 1-800-525-2000
www.eatonelectrical.com

EAT•N

Cutler-Hammer

© 2004 Eaton Corporation
All Rights Reserved
Printed in USA
Publication No. MN04003011E/CPG
January 2004